

UNISEAL RUBBER FITTING • 1”

Uniseal • 1” holesaw 44.4mm

Price: ₱ 320.00

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 1” UNI SEAL or 44.4mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱320.00
Category: Fish Tank Accessories



UNISEAL RUBBER FITTING • 1 1/4 “

Uniseal • 1 1/4 “ holesaw 50mm

Price: ₱ 345.00

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 1 1/4” UNI SEAL or 50mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱345.00
Category: Fish Tank Accessories

Aquaponics Go Green Trading & Enterprise



UNISEAL RUBBER FITTING • 1 1/2”

Uniseal • 1 1/2” holesaw 63mm

Price: ₱ 375.00

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 1 1/2” UNI SEAL or 63mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱375.00
Category: Fish Tank Accessories



HOSE CLAMP 12 – 22MM

Size:

- **12 – 22mm for ₱ 17.50**

Price: ₱17.50
Category: Fish Tank Accessories

Aquaponics Go Green Trading & Enterprise



UNISEAL RUBBER FITTING • 2”

Uniseal • 2” holesaw 76.2mm

Price: ₱ 465.00

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 2” UNI SEAL or 76.2mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱465.00
Category: Fish Tank Accessories



UNISEAL RUBBER FITTING • 3”

Uniseal • 3” holesaw 101.6mm


Price: ₱ 560.00

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 3” UNI SEAL or 101.6mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱560.00
Category: Fish Tank Accessories

Aquaponics Go Green Trading & Enterprise

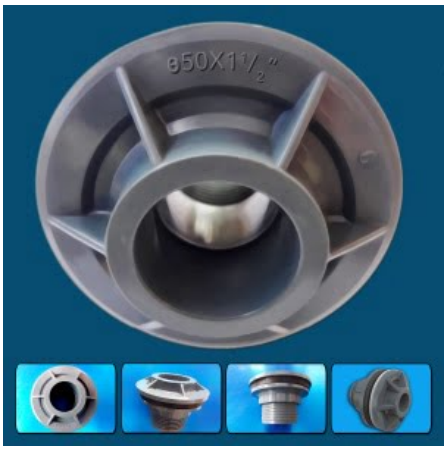

PLASTIC TANK CONNECTOR

Plastic Tank Connector (Bulk Head)

- 1” - 150 / pc.
- 1 ¼ - 175 /pc.
- 1 ½” - 205 / pc.
- 2” - 295 / pc.

- Plastic Tank Connector (Bulk Head)

- For drum, tank or any other application

- Perfectly match for Philippine Blue pipes.

Variations

Image	SKU	Description	Stock Status	Size	Price	Comment
	PTACO			1 1/2 "	₱205.00	
	PTACO			1 1/4"	₱175.00	
	PTACO			1"	₱150.00	
	PTACO			2"	₱295.00	

Price: ₱150.00 – ₱295.00
Category: Fish Tank Accessories

Aquaponics Go Green Trading Enterprise



UNISEAL RUBBER FITTING • 4”

Uniseal • 4” holesaw 127mm

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 4” UNI SEAL = 4.000” or 127mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱795.00
Category: Fish Tank Accessories



UNISEAL RUBBER FITTING • 3/4”

Uniseal • 3/4” holesaw 31.75mm

Installation Instructions:

1. Cut hole to the Holesaw size indicated for the UNI SEAL you are using 3/4” UNI SEAL or 31.75mm Hole (Holesaw).
2. Ensure that the hole is clean cut with sharp edges. Irregularities could cause poor seating and ultimate leakage.
3. Insert the UNI SEAL into the hole with the wide side facing the pipe to be inserted.
4. Make certain that the pipe end to be inserted is clean cut. File the edges so that there are no sharp points to cut UNI SEAL.
5. Using Detergent, lubricate the outside of the pipe end to be inserted, and then push the pipe through the UNI SEAL from the large flange side. The detergent will be squeezed off as the pipe passes through the UNI SEAL. The co-efficient of friction of the rubber holds the pipe tightly in place

Price: ₱295.00
Category: Fish Tank Accessories

Aquaponics Go Green Trading & Enterprise